

Performance Degradation Mechanism of Hemp Fiber-Reinforced Polypropylene Composites under Accelerated Aging

Wei Guo^{1,2}, Xiaorui Liu^{1,2,3}, Feng Zhao^{1,2,*}, Huayao Huang^{1,2}, and Bo Li^{4,*}

¹ State Key Laboratory of Light Superalloys, Wuhan University of Technology, Wuhan 430070, China;

² Hubei Key Laboratory of Advanced Technology for Automotive Components, Wuhan University of Technology, Wuhan, China;

³ GAC Honda Automobile Research & Development Co., Ltd., Guangzhou, China;

⁴ GAC Automotive Research and Development Center, Guangzhou, China;

* Correspondence: zhaof@whut.edu.cn (F.Z.); libo1@gacrnd.com (B.L.)

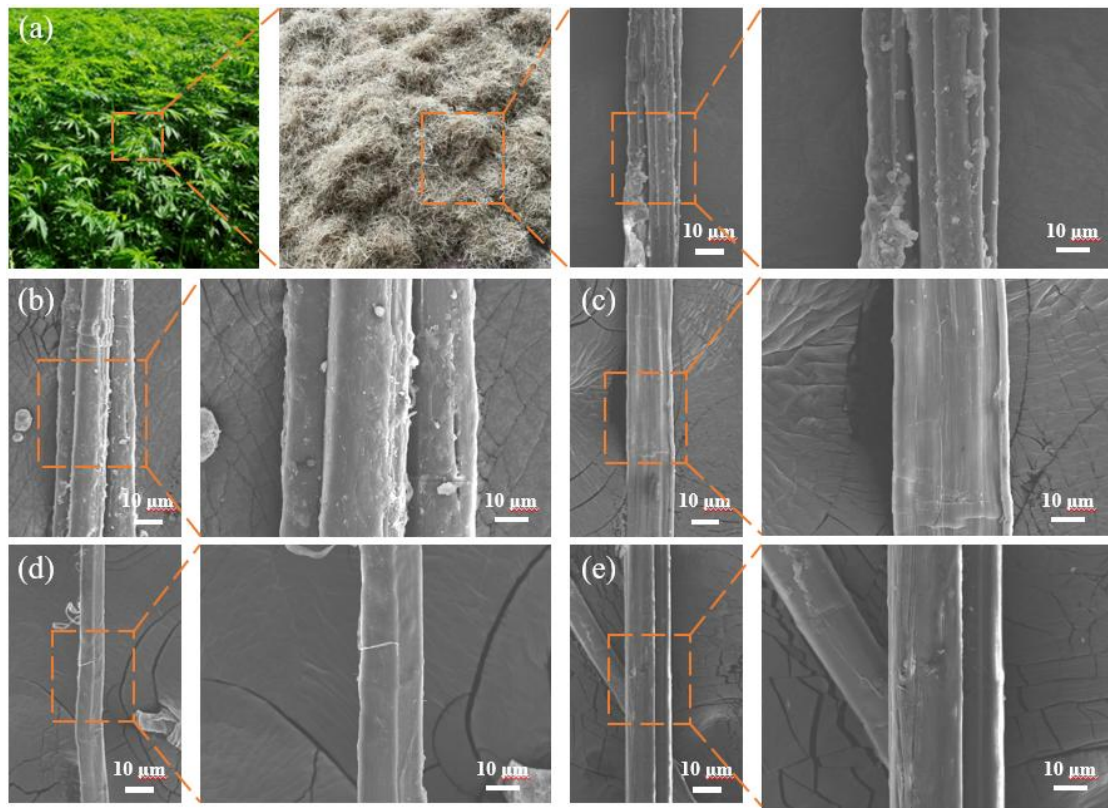


Figure S1. (a) Surface morphology of untreated HF. (b) Surface morphology of HF following treatment with 2.5 wt% NaOH. (c) Surface morphology of HF following treatment with 5 wt% NaOH. (d) Surface morphology of HF following treatment with 7.5 wt% NaOH. (e) Surface morphology of HF following treatment with 10 wt% NaOH.